



# FTW 50Hz CAPACITY RANGE CHART

## FTW352

CAPACITY RANGE CHART

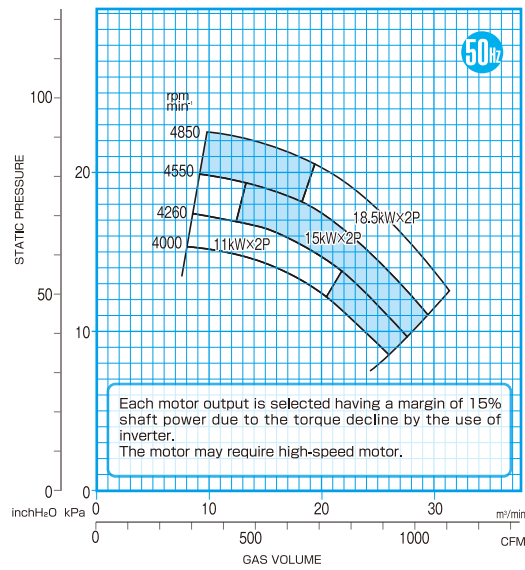


SOUND LEVEL

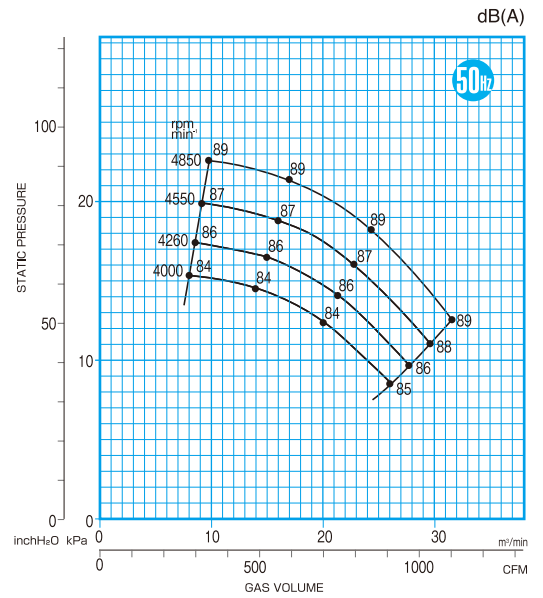


## FTW401

CAPACITY RANGE CHART

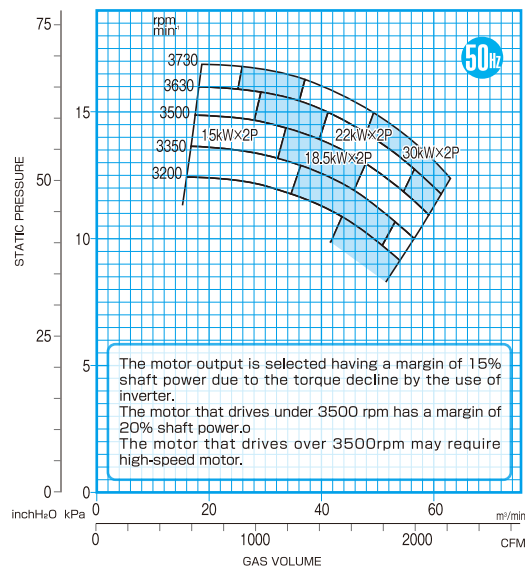


SOUND LEVEL

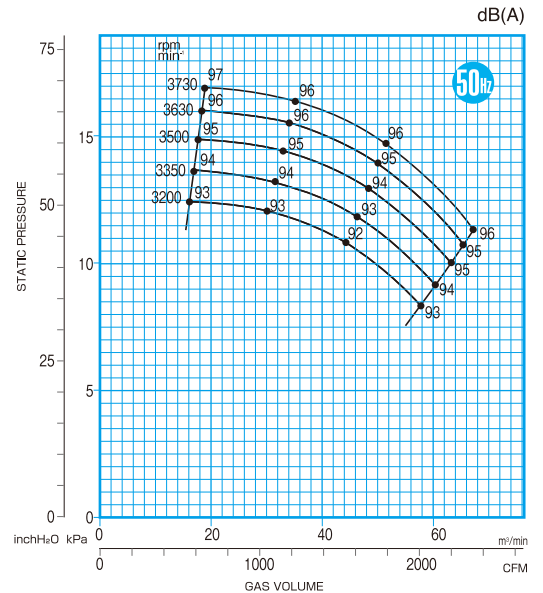


## FTW403

CAPACITY RANGE CHART

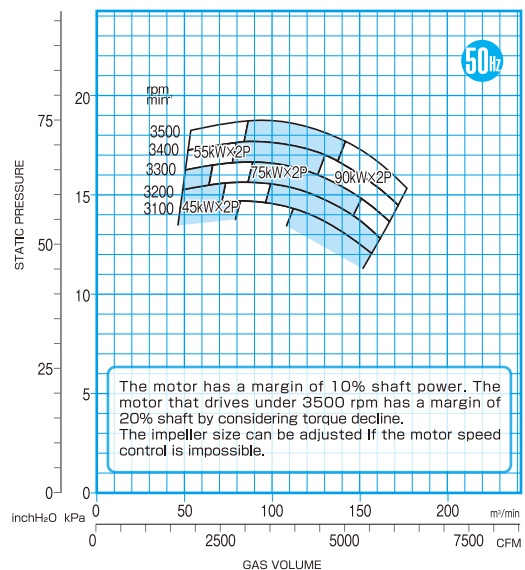


SOUND LEVEL

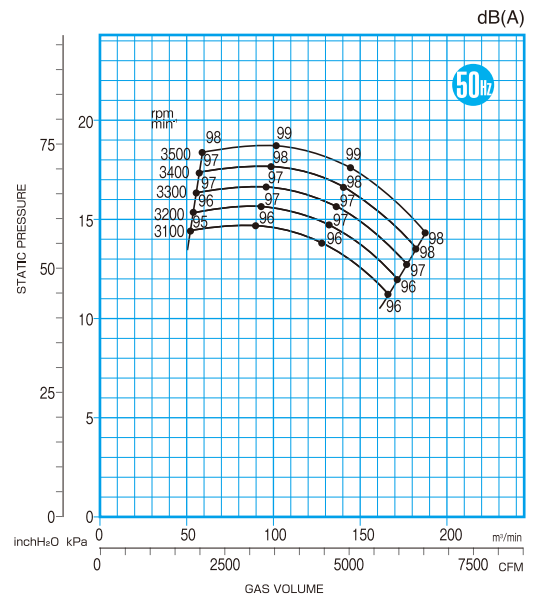

# DIMENSIONS

## FTW

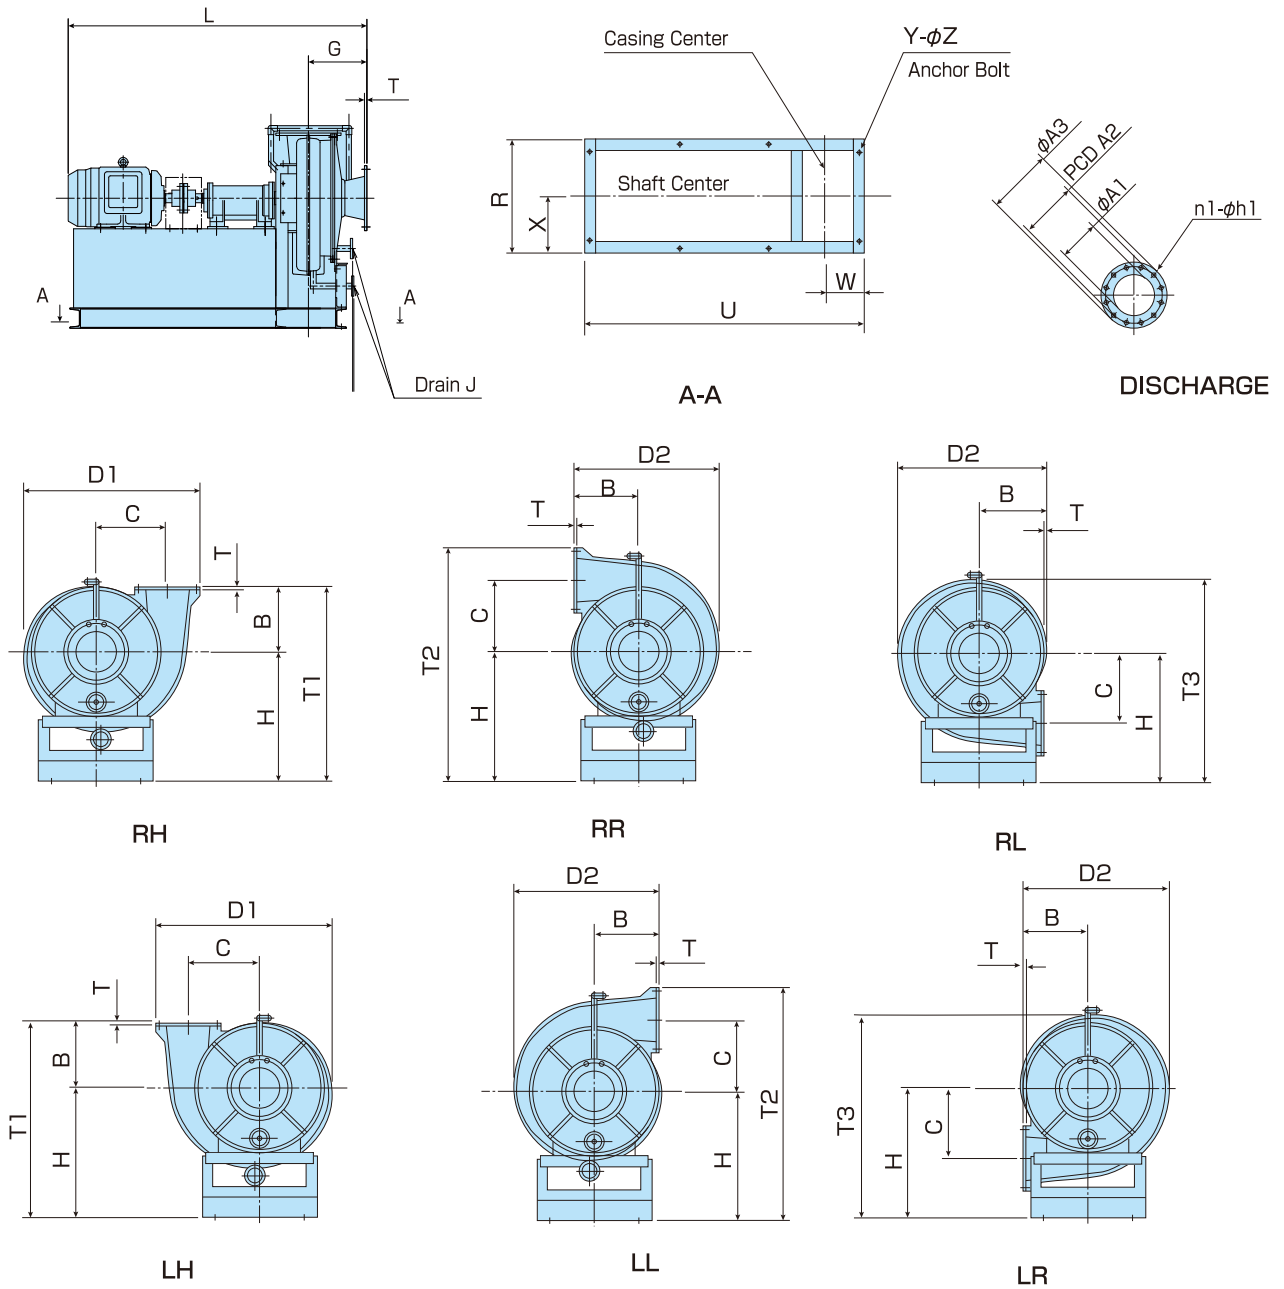

MODEL	CASING BODY										DRAIN J	BEARING	
	L	H	B	C	D1	D2	T1	T2	T3	G		IMPELLER	MOTOR
FTW352	56.0	28.5	13.8	14.6	35.1	31.0	42.3	48.0	44.1	11.0	1"	6210	6207
FTW401	72.2	31.5	15.7	16.9	42.4	35.4	47.2	56.3	49.1	14.2	1"	6215	6213
FTW403	86.5	37.4	19.7	21.5	54.1	46.3	57.1	68.5	60.4	18.5	2"	6215	6213

MODEL	FLANGES						BASE						BODY WEIGHT lb
	phi A1	PDC A2	phi A3	n1	h2	T	R	U	W	X	Y	Z	
FTW352	4.9	8.3	9.8	8	0.9	0.6	23.6	51.2	6.5	11.8	0.3	0.7	926.1
FTW401	9.8	14.0	15.7	12	1.0	0.6	27.6	66.9	9.2	13.8	0.3	0.7	1499.4
FTW403	13.8	17.5	19.3	16	1.0	0.6	31.5	78.7	12.1	15.7	0.3	0.9	1984.5

※BODY WEIGHT : Not Including Motor Weight.